

HSE ROHS

SPECIFICATIONS


Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Sn Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PA46

Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


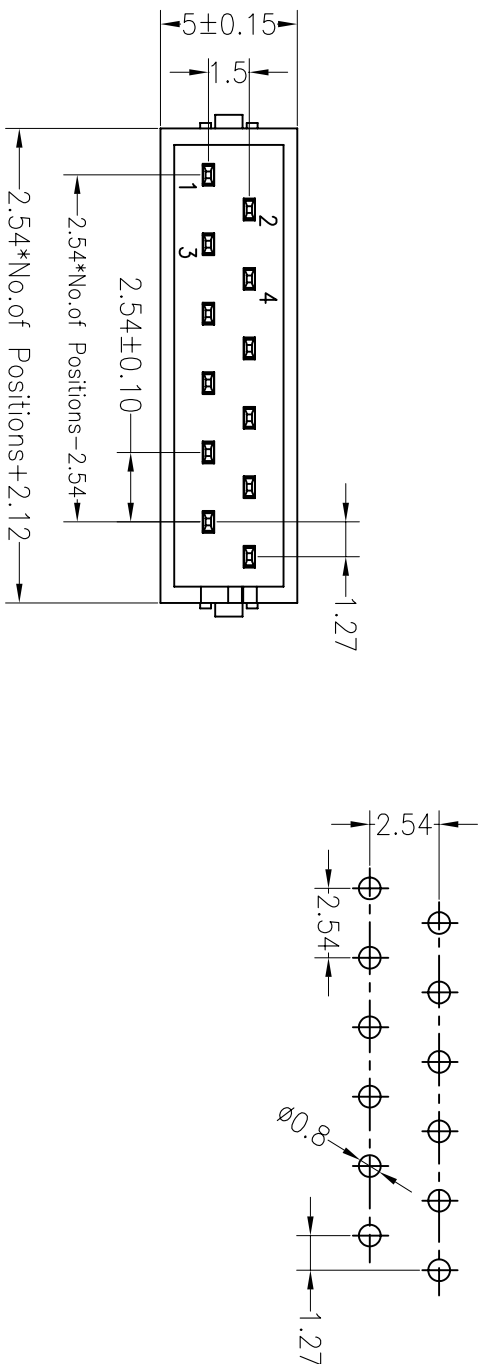


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

4000 XX M S SN X N X 01

No. of Pins: 04~26P
 Contact Plating: Solder Flash/Tin
 Insulator Material Option: A=BK-PBT, D=BK-PA46
 Packing: T=Tube, R=Reel

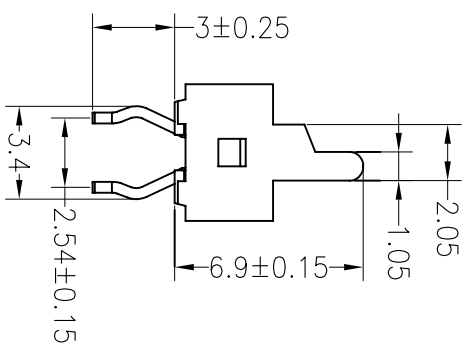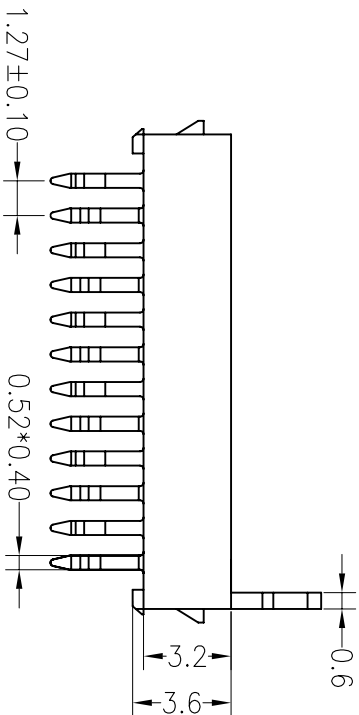

OPERATION		DRAW		BEN		SCALE		FIT		PART NO.	
X.X	±0.30			12.04.11		UNIT	mm	A4	1/1	4000XXMSSNXX01	
X.XX	±0.20	CHECK				SIZE	A4	SHEET	1/1	SHENZHEN JINLING ELECTRONIC CO.,LTD	
X.XXX	±0.10					SHEET	1/1	PROJ.	1/1	深圳市锦凌电子有限公司	
Angle	±3°	APPROVE								SHENZHEN JINLING ELECTRONIC CO.,LTD	
DIM	TOL									Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
CHANGE										MICRO MATCH Connector Male 180°	

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV A0 2012.04.11 NEW DRAWING

1 2 3 4 5 6 7 8 9