



SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

3210 XX S XX X B K00 X01

- No.of Pins 6--64
- Contact Plating G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold G6:10U" Gold G7:15U" Gold S0:Gold Flash/Tin
- Insulator Material Option A=BK-PBT C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP
- Packing T=Tube A=Tray P=Tube+Cap

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

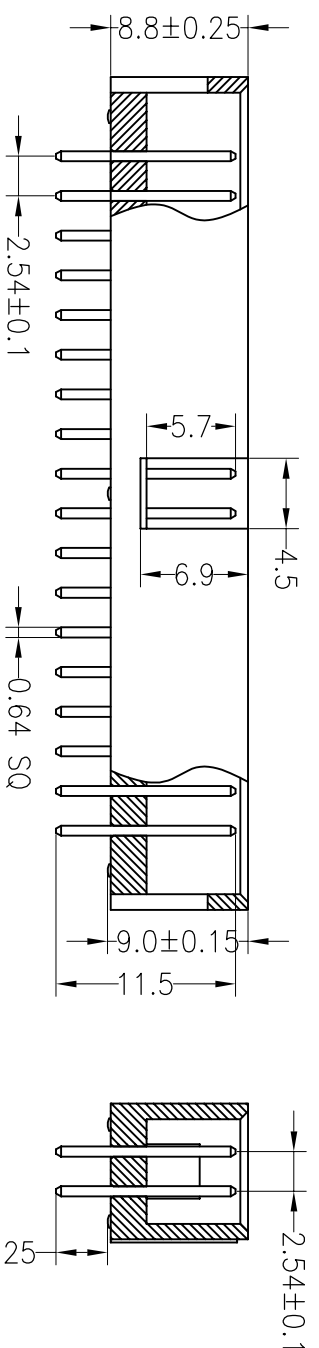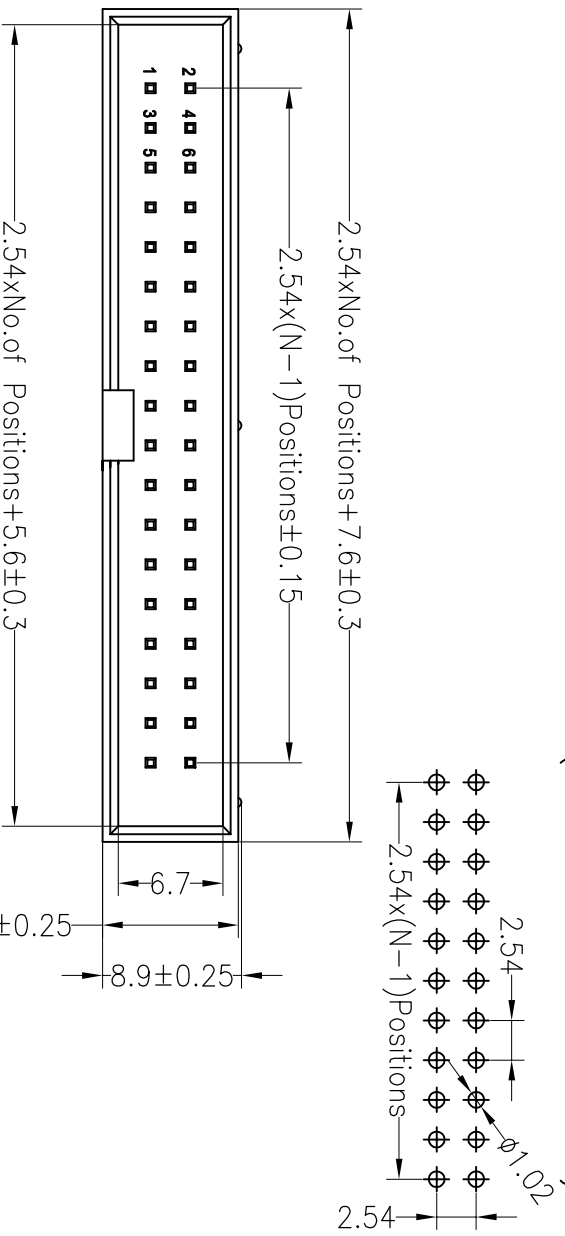

OPERATION		DRAW		SCALE	FIT	TITLE:	
DIM	TOL	APPROVE	YUSheng	UNIT	mm	PART NO.	2.54mm Box Header H8.8mm 180°
X.XX	±0.30	CHECK	19.09.21	A4	1/1	3210XXXXXXBK00X01	
X.XX	±0.20						
X.XXX	±0.10						
Angle	±3°						
DATE	MODIFICATION DESCRIPTION	CHANGE		PROJ.			
2019.09.21	NEW DRAWING						
REV							
A0							
1							

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992